Bohle



Simply Showers Hardware Supplies

Simply Showers...

Bohle presents a simple overview to our extensive range of shower hardware, offering hinges and fittings to suit every pocket. Divided into Basic, Select and Premium product groups, we offer reliable, high quality hardware in a range of price options. This straightforward guide will offer you options for the construction of the most popular shower configurations, including hinges, reinforcement bars, clamps, handles and sealing strips. To find out more about our comprehensive range please contact our friendly and knowledgeable Customer Services staff, who are more than happy to help you with your enquiries, or visit our website www.bohle-group.com.

"Fittings for glass"

Discover the World of Bohle Hardware

The new high impact duo for your hardware projects: The Design Manual with its large application images is perfectly suited for choosing the suitable fittings together with your customers. The Planning Manual contains all technical data and forms the basis for quickly and easily calculating and implementing your projects and orders with Bohle products.





Index

01	Shower Door Hinges Overview	4
02	Barcelona Shower Door Hinges	6
03	Bilbao Shower Door Hinges	7
04	Europe Shower Door Hinges	8
05	Barcelona Select Shower Door Hinges	9
06	Bilbao Select Shower Door Hinges	10
07	Granada Shower Door Hinges	11
08	Bilbao Premium Shower Door Hinges	12
09	Aqua Shower Door Hinges	13
10	Profiles for Glass Partitions	14
11	Transparent Setting and Distance Blocks and Duplocoll®	15
12	Sealing Strips	16
13	Thresholds	22
14	Basic round Reinforcement Bars	23
15	Premium round Reinforcement Bars	24
16	Basic square Reinforcement Bars	25
17	Premium square Reinforcement Bars	26
18	Doorknobs, Handles and Towel Holders for Showers	27
19	BriteGuard®	30
20	Limescale Remover	33
21	Ways to contact us	35

Shower Door Hinges

ShowerTec® Basic	Barcelona	Bilbao
Swinging Shower Door Hinge	/	✓
Shower Door Hinge for one-side opening doors, continuous sealing strip		
Flush on the inner side		
Rise and fall mechanism		
Adjustment of zero position		
Drill holes in glass		
Glass cut-out	✓	✓
Glass thickness tempered glass (mm)	8 / 10 / 12	8 / 10 / 12
Maximum door weight (kg)	35	35
Glass size (mm)	700 x 2000	700 x 2000

ShowerTec®	Europe	Barcelona Select	Bilbao Select	Granada
Select				
Swinging Shower Door Hinge	/	✓	√	/
Shower Door Hinge for one-side opening doors, continuous sealing strip				
Flush on the inner side				
Rise and fall mechanism				
Adjustment of zero position	/	✓	1	✓
Drill holes in glass				
Glass cut-out	/	✓	✓	✓
Glass thickness tempered glass (mm)	8 / 10	8 / 10 / 12	8 / 10 / 12	8 / 10
Maximum door weight (kg)	40	35	35	35
Glass size (mm)	1000 x 2000	700 x 2000	700 x 2000	790 x 2000



Ola a Tana®	Bilbao
ShowerTec® Premium	
Swinging Shower Door Hinge	✓
Shower Door Hinge for one-side opening doors, continuous sealing strip	
Flush on the inner side	
Rise and fall mechanism	
Adjustment of zero position	✓
Drill holes in glass	
Glass cut-out	✓
Glass thickness tempered glass (mm)	8 / 10 / 12
Maximum door weight (kg)	36 / 50
Glass size (mm)	700 x 2000 / 1000 x 2000

"Handling Technology"

New Catalogue - Even Better Overview



You haven't yet received our catalogue? Download it at www.bohle-group.com.

Whatever you would like to lift, carry or fix - Bohle offers you the suitable handling device. Our extensive product portfolio is subdivided into the following divisions:

- 01 Handling with vacuum
- 02 Handling without vacuum
- 03 Handling devices
- 04 Fixing aids
- 05 Protective equipment

Bohle offers the appropriate product for any requirement. If you have any questions, our competent team is happy to assist you!

Barcelona Shower Door Hinges

Shower door hinges made of brass, suitable for 8, 10 or 12 mm glass. The hinges have an automatic return motion of $\sim \pm 15^{\circ}$ to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 35 kg, maximum door width: 700 mm To see the full range of Barcelona fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Shower Door Hinge	chrome- plated	stainless steel look
90° glass/wall, one side wall mounted	B0 5218110	B0 5218111
90° glass/wall, both sides wall mounted	B0 5219010	B0 5219011
180° glass/glass	B0 5219210	B0 5219211

	Corner Clamp Barcelona	chrome- plated	stainless steel look
5	90° glass/wall	B0 5200095	
	90° glass/glass	B0 5200097	
	90° glass/wall	BO 5219080	BO 5219081
	90° glass/glass	BO 5219060	BO 5219061
	Connector Barcelona	chrome- plated	stainless steel look
	90° glass/wall	BO 5219050	BO 5219051



Bilbao Shower Door Hinges

Shower door hinges made of brass, suitable for 8, 10 or 12 mm glass. The hinges have an automatic return motion of $\sim \pm 15^{\circ}$ to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 35 kg, maximum door width: 700 mm. To see the full range of Bilbao fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Shower Door Hinge Bilbao	chrome- plated	stainless steel look
90° glass/wall, one side wall mounted	B0 5211549	B0 5211550
90° glass/wall, large mounting plate, both sides wall mounted	B0 5218010	B0 5218011
180° glass/glass	B0 5218210	B0 5218211

	Corner Clamp Bilbao	chrome- plated	stainless steel look
	90° glass/glass	B0 5213130	
	90° glass/wall	B0 5213120	
	Connector Bilbao	chrome- plated	stainless steel look
	90° glass/wall	B0 5218420	B0 5218421
63	90° glass/wall	BO 5218430	BO 5218431



Europe Shower Door Hinges

The Europe series of shower door hinges was developed by Bohle, taking both functionality and aesthetics into account. This product range has a timeless design which fits perfectly in modern bathrooms. The zero position is individually adjustable by +/- 5° and can easily be reset at any time. The Europe series is suitable for 8 or 10 mm glass and door weights up to 40 kg with a maximum door width: of 1000 mm (for 8 mm glass).

Shower Door Hinge Europe	chrome- plated	matt chrome- plated	stainless steel look
90° glass/wall, one side wall mounted	BO 5400001	B0 5400002	
90° glass/wall, both sides wall mounted	BO 5400011	B0 5400012	B0 5400010
180° glass/glass aligned	BO 5400021	B0 5400022	B0 5400020
Corner Clamp Europe	chrome- plated	matt chrome- plated	stainless steel look
90° glass/wall	B0 5400071	B0 5400072	B0 5400070
90° glass/glass	BO 5400081	B0 5400082	B0 5400080
Connector Europe	chrome- plated	matt chrome- plated	stainless steel look
90° glass/wall	BO 5400061	B0 5400062	B0 5400060



Barcelona Select Shower Door Hinges

Shower door hinges made of brass, suitable for 8, 10 or 12 mm glass. The hinges have an automatic return motion of $\sim \pm 15^{\circ}$ to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 35 kg \cdot maximum door width: 700 mm. The zero position is adjustable.

To see the full range of Barcelona Select fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Shower Door Hinge	chrome- plated	stainless steel look
90° (adjustable) one side wall mounted	B0 5219110	B0 5219111
90° (adjustable) both sides wall mounted	B0 5219114	BO 5219115
90° glass/wall, divided mounting plate, both sides wall mounted	BO 5219130	B0 5219131
180° (adjustable) glass/glass	BO 5219118	BO 5219119

Corner Clamp		chrome- plated	stainless steel look
5	90° glass/wall	B0 5200095	
	90° glass/glass	B0 5200097	
	90° glass/wall	BO 5219080	B0 5219081
	90° glass/glass	BO 5219060	B0 5219061



Bilbao Select Shower Door Hinges

Shower door hinges made of brass, suitable for 8, 10 or 12 mm glass. The hinges have an automatic return motion of $\sim \pm 15^{\circ}$ to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 35 kg, maximum door width: 700 mm. The zero position is adjustable.

To see the full range of Bilbao Select fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

	Shower Door Hinge	chrome- plated	stainless steel look
	90° (adjustable) one side wall mounted	B0 5211546	B0 5211547
	90° (adjustable) both sides wall mounted	BO 5211516	B0 5211517
	180° (adjustable) glass/glass	B0 5211716	B0 5211717
	Corner Clamp	chrome- plated	stainless steel look
	90° glass/glass	B0 5213150	B0 5213151
0	90° glass/wall	B0 5213140	BO 5213141



Granada Shower Door Hinges

Shower door hinges made of brass, suitable for 8 or 10 mm glass. The hinges have an automatic return motion of $\sim \pm$ 15° to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 35 kg, maximum door width: 790 mm \cdot with adjustable zero position.

To see the full range of Granada fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

	Shower Door Hinge Granada	chrome- plated	stainless steel look
	90° glass/wall, one side wall mounted	BO 5214058	B0 5214046
© ⊙	90° glass/wall, both sides wall mounted	B0 5214050	B0 5214045
	180° glass/glass	B0 5214052	B0 5214047
	Corner Clamp Granada	chrome- plated	stainless steel look
5	90° glass/glass	B0 5213622	
	90° glass/wall	BO 5213116	
	Connector Granada	chrome- plated	stainless steel look
	90° glass/wall	B0 5213606	B0 5213605



Bilbao Premium Shower Door Hinges

Shower door hinges made of brass, suitable for 8, 10 or 12 mm glass. The hinges have an automatic return motion of $\sim \pm 15^{\circ}$ to zero position. Outside this automatic return range, the hinges remain in any set position. Maximum door weight: 36/50 kg, maximum door width: 700/1000 mm \cdot with adjustable zero position.

To see the full range of Bilbao Premium fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Shower Door Hinge	chrome-plated 36 kg	stainless steel look - 36 kg	chrome-plated 50 kg	stainless steel look - 50 kg
90° (adjustable) one side wall mounted	B0 5211553	BO 5211554	B0 5211563	B0 5211564
90° (adjustable) both side wall mounted	B0 5211551	B0 5211552	BO 5211561	BO 5211562
Corner Clamp	chrome-plated	stainless steel look	chrome-plated	stainless steel look
90° one side wall mounted	BO 5211569	B0 5211570	B0 5211567	BO 5211568



Aqua Shower Door Hinges

Hold position both sides 90 $^{\circ}$ · Length 2200 mm · Material Aluminium · Application glass/wall, glass/glass · Projection 800 mm · with Rise and fall mechanism · Zero position: infinitely adjustable

To see the full Aqua fittings range visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.



Art. No.	Glass thickness · Finish
B0 5200405	6 mm · anodised aluminium EV1
BO 5200406	6 mm · polished
BO 5200407	8 mm · anodised aluminium EV1
BO 5200408	8 mm · polished
BO 5200409	Aqua Fixed Sidelight for 6 mm · anodised aluminium EV1
BO 5200410	Aqua Fixed Sidelight for 6 mm · polished
BO 5200416	Aqua Fixed Sidelight for 8 mm · anodised aluminium EV1
B0 5200417	Aqua Fixed Sidelight for 8 mm · polished



Profiles for Glass Partitions

Aluminium u-channels in 2150 mm, 2500 mm, 3650 mm and 5000 mm lengths for various glass thicknesses. Available in polished anodised, anodised and stainless steel look finishes. We also have a range of profiles for glass partitions, and mirror profiles for fitting 6 mm mirrors singly or as a complete wall to sound walls or other materials suitable for the intended load.

NBohle

U-Channels




For installing fixed glass partitions \cdot with radius corners \cdot drilling guide in the bottom of the profile

1 Length 3650 mm ⋅ Glass thickness 8 mm ⋅ Material Aluminium

Art. No.	Finish
B0 6703415	polished anodised
B0 6703416	anodised

NBohle

U-Channels




For installing fixed glass partitions - with radius corners - drilling guide in the bottom of the profile

1 Length 3650 mm ⋅ Glass thickness 10 mm ⋅ Material Aluminium

Art. No.	Finish
BO 6703420	polished anodised
B0 6703421	anodised
B0 6703422	stainless steel look

NRable

U-Channels




For installing fixed glass partitions · with radius corners · drilling guide in the bottom of the profile

• Length 3650 mm · Glass thickness 12 mm · Material Aluminium

Art. No.	Finish
B0 6703440	polished anodised

NBohle


U-Channels



For installing fixed glass partitions \cdot with radius corners \cdot drilling guide in the bottom of the profile

① Length 2500 mm · Material Aluminium

Art. No.	Finish · Glass thickness
B0 6703430	polished anodised · 8 mm
B0 6703431	polished anodised · 10 mm
B0 6703432	stainless steel look· 10 mm
B0 6703433	polished anodised · 12 mm

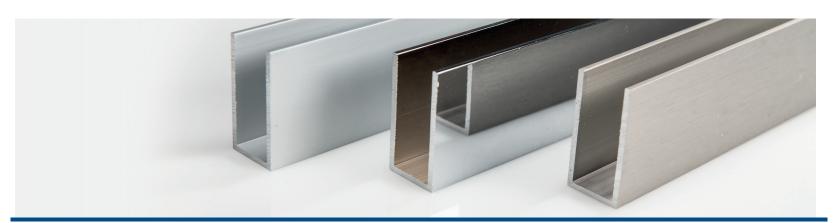

Transparent Setting and Distance Blocks and Duplocoll®

NBobbe Transparent Setting and Distance Blocks



Transparent setting blocks made of plastic · for use when mounting allglass showers, all-glass assemblies, mirrors or other glazing applications

Art. No.	Description
B0 5121001	50 mm x 6 mm x 1 mm, 100 per bag
B0 5121002	50 mm x 6 mm x 2 mm, 100 per bag
B0 5121003	50 mm x 6 mm x 3 mm, 100 per bag
B0 5121004	50 mm x 6 mm x 4 mm, 100 per bag
BO 5121005	50 mm x 6 mm x 5 mm, 100 per bag
BO 5121006	50 mm x 6 mm x 6 mm, 100 per bag
BO 5121008	50 mm x 6 mm x 8 mm, 100 per bag
B0 5121010	50 mm x 6 mm x 10 mm, 100 per bag
B0 5121011	Set of 25 blocks of each size, bag of 200

Also available in 5 m rolls! You choose the length of the setting blocks!

Art. No.	Description
B0 5121002R	6 mm x 2 mm x 5 mtrs
B0 5121003R	6 mm x 3 mm x 5 mtrs
B0 5121004R	6 mm x 4 mm x 5 mtrs

Adhesive Bonding Tapes Bohle Duplocoll®







- For different applications, such as all-glass partition walls, furniture, shower cubicles and much more
- · For different materials, such as wood, aluminium, plastic, ceramic or glass
- \cdot High transparency due to a light refractive index almost identical to glass
- · Antimicrobial effect inhibits growth of microorganisms
- By sealing the edges of the adhesive tape, Duplocoll® becomes dry after adhesion and resistant to external influences
- · Elongation of up to 500% and highly split-resistant
- · Resistant to chemicals and softeners
- · Very good initial tack, lasting ultimate bonding strength
- Also suitable for rough surfaces: The viscoelastic adhesive film distributes evenly across rough surfaces.
- Resistant to ageing and UV radiation, economic, high quality and does not affect the external appearance of the construction

Thickness 3 mm \cdot Colour transparent \cdot Roll length 12 m \cdot Max. allowable continuous temperature: -40°C - +100°C


Please note: Please use the corresponding applicator to ensure simple and precise application on the glass edge.

Art. No.	Width · Glass thickness
B0 5207936	5 mm · 8 mm
B0 5207938	7 mm · 10 mm
B0 5207935	9 mm · 12 - 12.7 mm
Art. No.	Description · Glass thickness

Art. No.	Description · Glass thickness
B0 5207939	Applicator ⋅ 8, 10 mm
B0 5207948	Inlay for BO 5207939 · 10, 12 mm
B0 5207946	Applicator · 10.76; 12.7; 12.76 mm
BO 5207947	Inlay for BO 5207946 · 8.76; 10.76 mm


Shower Door Sealing Strips

The following page shows some suggested sealing strip positions. There are different seals configurations that can be used and this is intended as a guide only.




Type 1

For shower hinges with a 7 - 8 mm glass-wall gap.



Type 6

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 2

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 7

For shower hinges with a 7 - 8 mm glass-wall gap.



Type 3

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 8

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 4

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 9

For shower hinges with a 7 - 8 mm glass-wall gap.



Type 5

For shower hinges with a 7 - 8 mm glass-wall gap.




Type 10

For shower hinges with a 7 - 8 mm glass-wall gap.



Sealing Strip Glass thickness 6 - 8 mm, Type A

With lower sealing lip and 8 mm water deflector




Art. No.		
B0 5213490		

NBohle

Sealing Strip Glass thickness 10 - 12 mm, Type A

With lower sealing lip and 8 mm water deflector




🛈 Glass thickness 10 + 12 mm · Length 2160 mm · Material: plast	0	Glass thickness	10 + 12 mm ·	Length 2160	mm · N	Material: pla	stic
---	---	-----------------	--------------	-------------	--------	---------------	------

Art. No.		
B0 5281091		

NBohle

Sealing Strip Glass thickness 6 - 8 mm with bellows, Type B




❶ With bellows · Glass thickness 6 + 8 mm · Length 2160 mm · Material: plasti

Art. No.		
B0 5213517		

NBohle

Sealing Strip Glass thickness 10 - 12 mm with bellows, Type B




O	With bellows -	Glass thickness	10 + 12 mm	· Length 2160 mm	· Material: plasti
---	----------------	-----------------	------------	------------------	--------------------

Art. No.		
BO 5281020		

NR-LI-

Sealing Strip Glass thickness 6 - 8 mm Door aligned 180°, Type C



Seals	between	fixed	panel	and	door

🛈 Glass thickness 6 + 8 mm · Length 2160 mm · Door aligned 180 ° · Material: r	olastic
--	---------

Art. No.			
B0 5213518			

Shower Door Sealing Strips

Sealing Strip Glass thickness 8 - 10 mm Door aligned 180°, Type C Seals between fixed panel and door Glass thickness 8 + 10 mm · Length 2160 mm · Door aligned 180 ° · Material: plastic Art. No. BO 5281018 Sealing Strip Glass thickness 6 - 8 mm Door / Fixed glazing 90°, Type D **NBohle** Seals between fixed panel and door Glass thickness 6 + 8 mm · Length 2160 mm · Door / Fixed glazing 90 ° · Material: plastic Art. No. BO 5213519 für 6 mm Sealing Strip Glass thickness 8 - 10 mm Door / Fixed glazing 90°, Type D **NBohle** Seals between fixed panel and door ● Glass thickness 8 + 10 mm · Length 2160 mm · Door / Fixed glazing 90 ° · Material: plastic BO 5281019 für 8 mm für 10 mm Sealing Strip Glass thickness 6 - 8 mm, magnetic profile for corner access 90°, Type E For corner access 90° ● With magnetic profile · Glass thickness 6 + 8 mm · Length 2160 mm · Material: plastic Art. No.

BO 5213529



NBohle

For corner access 90°


Art. No.

Sealing Strip Glass thickness	10 -	12 mm,	magnetic	profile	for	corner
access 90°, Type E						

1	With magnetic profile	· Glass thickness	10 + 12 mm	Length 2160 mm	Material:	olastic

Art. No.		
B0 5281031		

Sealing Strip for 6 - 8 mm glass, magnetic profile Door aligned 180°, Type F




0	With magnetic profile	. Door aligned 180 °	· Glass thickness 6 + 8 mm	. Lenath 2160 mm	. Material: nlasti
0	vvitti illaqiletic profile	· Duul allylieu tou	· 01455 11111KHE55 0 + 0 111111	· Length Z 100 mill	· Material, plastii

	B0 5213530			
<u>/</u>				
n				

Sealing Strip Glass thickness 10 - 12 mm with magnetic profile Door NBohle aligned 180°, Type F


● With magnetic profile · Door aligned 180 ° · Glass thickness 10 + 12 mm · Length 2160 mm · Material: plastic



Art. No.		
B0 5281032		

Sealing Strip Glass thickness 6 - 8 mm with magnetic profile 135°

lacktriangled With magnetic profile \cdot Angle 135 $^\circ$ \cdot Glass thickness 6 + 8 mm \cdot Length 2160 mm \cdot Material: plastic




Art. No.		
B0 5213515		

Shower Door Sealing Strips

VBoble Sealin

Sealing Strip Glass thickness 10 - 12 mm with magnetic profile 135°



With magnetic profile · Angle 135 ° · Glass thickness 10 + 12 mm · Length 2160 mm · Material:	plastic
---	---------


Art. No.			
B0 5281016			

NBohle

Sealing Strip, glass-glass 180°, Glass thickness 6 mm

For glass / glass · overlapping 180° · for use with shower door hinges "Wave" B0 53 300 52 - 56

Glass thickness 6 mm · Length 2200 mm · Material: plastic




Art. No.			
DO 5212527			

NBohle

Sealing Strip, glass-glass 180°, Glass thickness 8 mm

For glass / glass - overlapping 180° - for use with shower door hinges "Wave" B0 53 300 52 - 56 $\,$




1 Glass thickness 8 mm ⋅ Length 2200 mm ⋅ Material: plastic

Art. No.		
B0 5213524		

NBoble

Sealing Strip Glass thickness 8 mm with sealing lip




With sealing lip · seals between glass edge and wall

Art. No.		
B0 5213492		

NRabla

Sealing Strip Glass thickness 10 mm with sealing lip



With sealing lip \cdot seals between glass edge and wall

Glass thickness 10 mm · Length 2160 mm · Material: plastic

Art. No.			
B0 5281092			



NBohle

Sealing Strip Glass thickness 6 - 8 mm without lower sealing lip

With 8 mm water deflector · but without lower sealing lip


. 1	۲ ، ـ	
	X	S
1		X
	8	11
	für 6	mm



Art. No.
BO 521349

NBohle

Sealing Strip Glass thickness 6 - 8 mm with lower sealing lip




With lower sealing lip

Glass thickness 6 + 8 mm · Length 2160 mm · Material: plastic

Art. No.	
BO 5213516	

NBohle

Sealing Strip, 2-Part Glass thickness 8 mm




Glass thickness 8 mm · Length 2485 mm · Material: plastic

Art. No.	
BU 251520	

With water deflector


NBohle

Sealing Strip Glass thickness 10 - 12 mm with water deflector



• Glass thickness 10 + 12 mm · Length 2160 mm · Material: plastic

Art. No.		
B0 5281093		

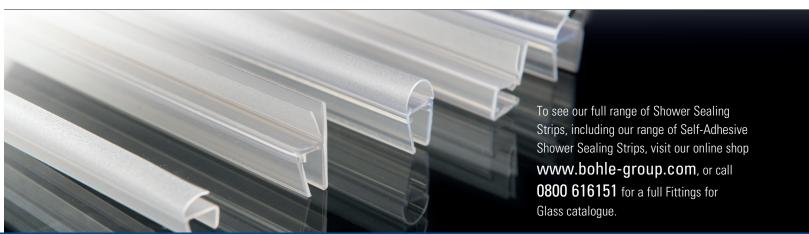

Thresholds

NBohle

Threshold



Non self-adhesive. Threshold must be fixed individually and on site.


1800 mm

Art. No.	Finish
BK 6907031	shiny silver coloured
BK 6907082	pure white RAL 9010

NBohle

Threshold end caps


Description: one each on the left and right sides



Art. No.	Finish	
BK 6907331	shiny silver coloured	
BK 6907382	pure white RAL 9010	

<u>NB</u>ohle

Threshold acrylic



• Height 10 mm · Width 20 mm · Material acrylic · Colour transparent

Art. No.	Length
BK 69080	1000 mm
BK 69081	2000 mm

NBohle

Threshold acrylic



Height 5 mm · Width 10 mm · Material acrylic · Colour transparent

Art. No.	Length
BK 69130	1000 mm
BK 69131	2000 mm

Basic round Reinforcement Bars

Easy to mount because the reinforcement bars can be trimmed to any desired length. No cut-outs or bore holes in the glass required. Glass holders are infinitely adjustable.

To see the full range of Basic round Reinforcement Bar fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Reinforcement Bar Bohle Basic round glass/wall



Bar can be trimmed to size

Diameter 12 mm · Glass thickness 8-10 mm · Finish chrome-plated · Material brass

Art. No.	Description · Length
B0 5420065	glass/wall · 1210 mm

Reinforcement Bar Bohle Basic round glass/glass

Length adjustable



1 Glass thickness 6—10 mm · Finish chrome-plated

Art. No.	Description · Length
B0 5420231	glass/glass . 750 - 1050 mm
B0 5420235	glass/glass . 1050 - 1350 mm



Premium round Reinforcement Bars

Well thought-out creation and design are the central focus of architecture. With its Premium products Bohle has succeeded in combining timeless elegance, aesthetics and freedom of movement with a blend of high-quality materials. The Premium round reinforcement bars have been specially designed for highly-frequented and barrier-free areas while maintaining their unobtrusive appearance. Made of polished stainless steel, the support bars fit harmoniously into any bathroom setting. To see the full range of Premium round Reinforcement Bar fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.

Reinforcement Bar Bohle Premium round glass/wall

Diameter 18 mm · Glass thickness 8 - 10 mm · Material stainless steel mirror polished


Art. No.	Description · Length
B0 5420076	glass/wall · 1000 mm
B0 5420078	glass/wall · 1500 mm

Reinforcement Bar Bohle Premium round glass/glass



Diameter 18 mm · Glass thickness
8 - 10 mm · Material stainless steel mirror polished

Art. No.	Description · Length
B0 5420072	glass/glass · 1000 mm
B0 5420074	glass/glass · 1500 mm

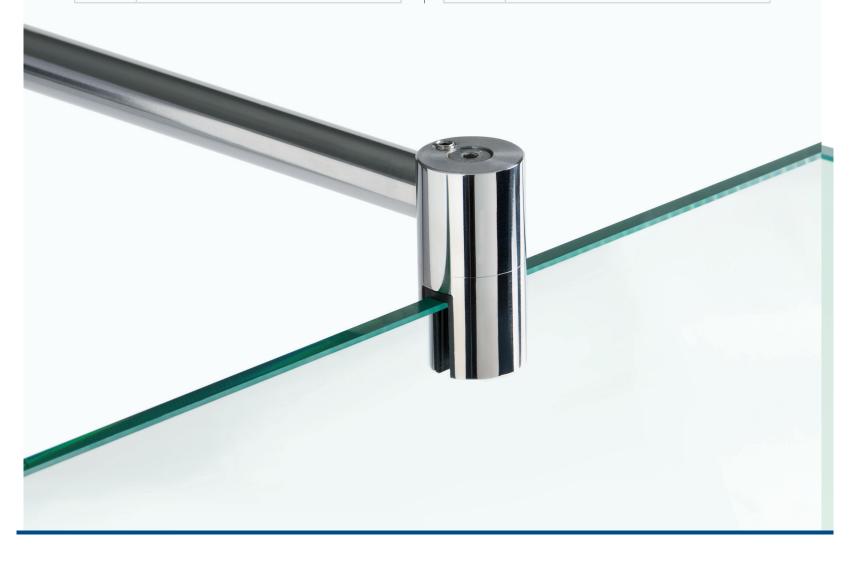

Basic square Reinforcement Bars

Timelessly modern. With Basic square, Bohle has achieved the perfect mix of form and function. The wide array of models enables almost any kind of customised construction project. Available in mirror polished and matt brushed stainless steel.

To see the full range of Basic square Reinforcement Bar fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.





Art. No.	Description · Length
B0 5420240	glass/wall · matt brushed
B0 5420241	glass/wall · mirror polished

Reinforcement Bar Bohle Basic square glass/glass



BO 5420236 glass/glass · matt brushed	
BO 5420237 glass/glass · mirror polished	



Premium square Reinforcement Bars

Less is more. Premium square achieves a perfect ratio of proportion, detail and material. Visible but unobtrusive. Premium square reinforcement bars captivate due to their clean straight lines. Minimalistic accentuation emphazises the features of modern bathroom landscapes. The brass support bars can easily be trimmed to size.

To see the full range of Premium square Reinforcement Bar fittings visit www.bohle-group.com, or phone 0800 616151 for a full Fittings for Glass catalogue.








Doorknobs, Handles and Towel Holders for Showers

The large variety of knobs, handles and towel holders helps individualise your shower cubicle to your personal bathroom concept. Great value is attached to the choice of different materials, finishes, applications and shapes available.

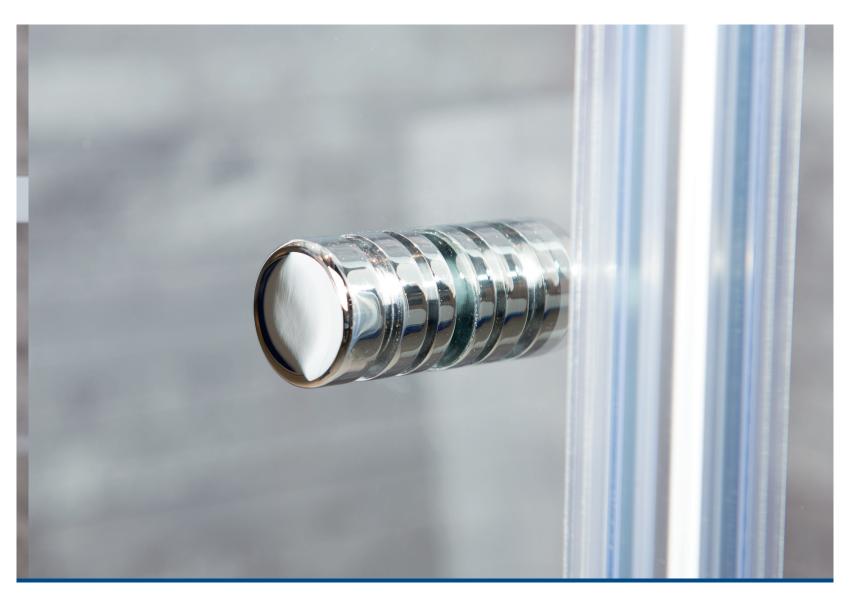

Door Knobs and Handles for Glass - At a (

Door Knobs for Glass				
Art. no.	B0 5213725/26	B0 5213705 - 10	B0 5213715/16	B0 5213722
Stainless steel 1.304				
Brass	✓	✓	✓	✓
Aluminium		✓		
Glass				
Glass thickness (mm)	6 - 10	6 - 10	6 - 10	6 - 10
Drill hole (mm)	10	10	10	10

Door Knobs for Glass				
Art. no.	B0 5213771	B0 5206704	BK 0503031/55	BO 5206711-13
Stainless steel 1.304				
Brass	✓	✓	✓	✓
Aluminium				
Glass				
Glass thickness (mm)	4 - 8	6 - 10	8 - 10	6 - 12
Drill hole (mm)	8	12	12	10

Door Handles for Glass				
Art. no.	B0 5113720+, B0 5113738+	BO 5212510-15	BO 5212520-25	B0 5212505-07
Stainless steel 1.304	✓	✓	✓	✓
Brass				
Aluminium				
Glass				
Glass thickness (mm)		4 - 12	4 - 12	6 - 10
Drill hole (mm)		10	10	10
Self-adhesive	✓			

Glance



	OFF.				
BO 5213781	B0 5206702-03 / B0 5206802	B0 5213700-02	BK 0501331	BK 0501531	B0 5213750-52
	✓		✓	✓	✓
	✓	✓			
✓					
6 - 10	6 - 8	6 - 10	6 - 12	6 - 12	6 - 10
12	12	16	14	14	12

THE STATE OF THE S	
BO 5206714-16	BO 5206717-19
✓	✓
6 - 12	6 - 12
10	10

BO 5213849	B0 5215023	B0 5215033-36	B0 5215024	B0 5215025	BO 5215026
✓	✓	✓	✓	✓	✓
6 - 8	6 - 12	6 - 12	6 - 12	6 - 12	6 - 12
14	12	12	14	12	14

BriteGuard® Smart surface protection

BriteGuard® is a registered brand of Bohle AG. For over 90 years we have been developing, producing and selling products for glass processing and finishing. No matter what you plan to do with glass, our full product range offers you the right products — including surface protection. With BriteGuard® Bohle has developed a surface protection system that is setting new standards. At the heart of the system are the two coating products BriteGuard® Surface SEALER for smooth surfaces and BriteGuard® Surface SEALER X for rough surfaces. The German Technical Inspection Agency, TÜV, has tested BriteGuard® Surface SEALER and confirmed that smooth glass surfaces become easy to clean and dirtrepellent when protected with BriteGuard® — typically for at least 10 years.

BriteGuard® Surface ACTIVATOR



For pre-cleaning smooth glass/glazed ceramic surfaces before applying Surface SEALER.

Art. No.	Description
B0 5831000	11

Bobbe BriteGuard® Surface SEALER



Surface SEALER is suitable for all smooth glass or glazed ceramic surfaces. It makes no difference whether the coated material will be used indoors or outdoors or whether you want to protect showers, partitions, conservatories, facades or glass furniture.

Art. No.	Description
BO 5810500	500 ml
BO 5815000	51

BriteGuard® Surface FINISHER



For easy removal of excess material after applying Surface SEALER.

Art. No.	Description
BO 5841000	11

BriteGuard® Surface SEALER X



Surface SEALER X was specially developed for rough surfaces. This can be glass that is satin finished or sandblasted.

Art. No.	Description
B0 5820500	500 ml
BO 5825000	51

BriteGuard® Express

BO 5850050

Protect your showers quickly and easily before mounting with BriteGuard® Express. The coated glass surface is immediately protected and can be easily cleaned. In this way your customer will enjoy a high quality shower for a long time. Simply leave the remaining BriteGuard® Express with your customer after the first coating so that they can refresh the protection at any time. Once it is used up they can buy new material directly from you.


Benefits:

- Quick protection for all smooth glass surfaces
- Simple application clean the glass pane, apply BriteGuard® Express uniformly with a spray bottle and polish.
- The surface becomes hydrophobic immediately (water drips off)
- The glass remains protected & easy to clean for several months
- Can be renewed at any time
- For professional requirements and for use at home
- 500 ml bottle with spray head



Products for Care and Maintenance

We recommend Bohle Premium Glass Cleaner for routine cleaning. If the coating has been damaged due to improper use at the end customer's site, it can be refreshed quickly and easily with our BriteGuard® REFRESHER Set for smooth glass and our BriteGuard® REFRESHER X Set for sandblasted glass.

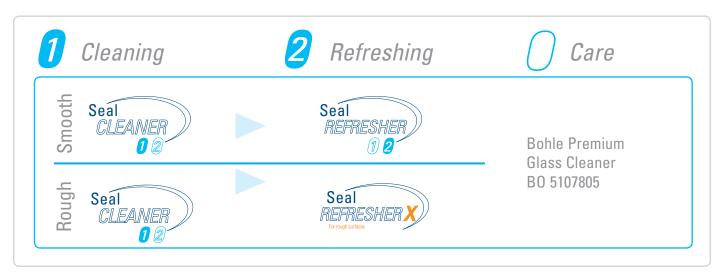

NBoble Seal REFRESHER Set



Seal CLEANER optimally prepares surfaces for treatment with Seal REFRESHER \cdot Seal REFRESHER is used to refresh the functional layer of smooth surfaces when its effectiveness diminishes (for example when it has been handled improperly).

Included in delivery:

1x BriteGuard® Seal CLEANER, 250 ml

1x BriteGuard® Seal RERESHER, 250 ml

1x Microfibre Cloth

Art. No.	
BO 5860250	Seal REFRESHER Set

NBoble Seal REFRESHER X Set

Seal CLEANER optimally prepares surfaces for treatment with Seal REFRESHER $X \cdot Seal$ REFRES



Included in delivery:

1x BriteGuard® Seal CLEANER, 250 ml

1x BriteGuard® Seal REFRESHER X, 250 ml

1x Microfibre Cloth

Art. No.	
B0 5860251	Seal REFRESHER X Set

Limescale Remover


BriteGuard® Limescale Remover for professional use or standard use at home. Spray BriteGuard® Limescale Remover onto the surface and allow a short while to take effect before removing with a clean towel.

Benefits:

- Can be reapplied at any time
- 500 ml bottle with spray head
- Spray BriteGuard® Limescale Remover onto the surface and allow a short while to take effect before removing with a clean towel.
- Suitable for pre-cleaning before using BriteGuard® Express

Art. no.	Contents
B0 5880100	100 ml, sample bottle
B0 5880500	500 ml
BO 5885000	51



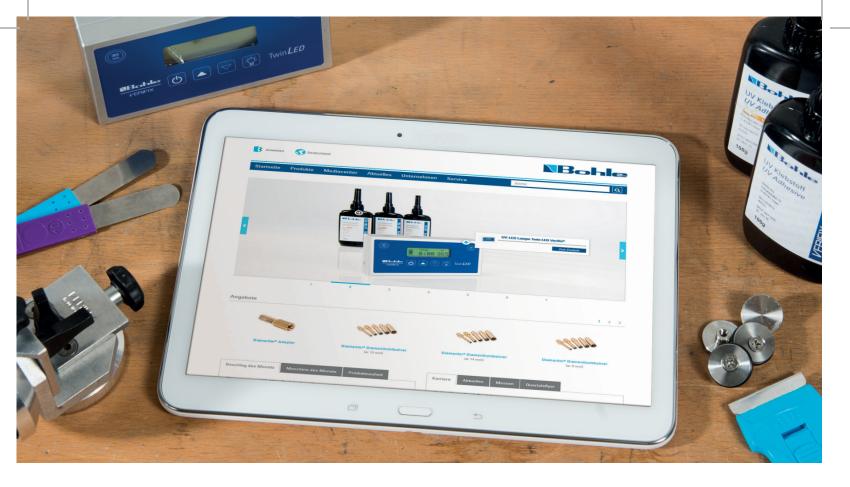

The Bohle Online Shop

The Bohle Online Shop offers you our latest product range around the clock in a clearly structured and informative way.

The brand new Online Shop has now been launched, featuring clearer layout, better performance and improved functionality.

www.bohle-group.com



Optimised for all digital devices.



Clearly structured product presentation with filter function.



Convenient search function.



Secure customer area with online and offline order history.



New offers and deals always updated.



24/7 the latest product portfolio.

How to contact Bohle

Bohle Ltd.

Bohle Online Shop www.bohle-group.com
Sales Telephone 0800 616151
Sales Fax 0161 344 0111
Machinery Sales & Support 0161 342 1104
Account Payments Direct 0161 342 1112
E-Mail info@bohle.ltd.uk
Pickup and Postal Address Fifth Avenue,

Tameside Park, Dukinfield Cheshire SK16 4PP

Office opening times

Monday to Friday 8.00 am - 5.00 pm

Collection point opening times

Monday to Friday 9.00 am - 3.30 pm



Notes about this catalogue

With the printing of this catalogue, all previous catalogues or parts thereof, are no longer valid. Our offers apply to retail, trade and industry. Technical specifications (dimensions, weights, materials, etc.) and other specifications (design, colour, etc.) are subject to change. The range of products can change during the time this catalogue is current. In particular, we reserve the right to remove individual articles without prior notice. Please request further details from your Bohle contact person. Print-related colour variations are possible. Bohle AG is not liable for any printing or other errors and omissions in this catalogue. For many of the articles protective rights such as patents, trademarks, design copyrights, etc. have been registered or are pending registration - also by third parties.

© Copyright by Bohle - This catalogue is protected in all parts (texts, photos, images etc.) by copyright. Any use outside the strict limits of copyright laws without written permission of Bohle AG is not permitted. This applies in particular to duplications, reprints, translations, microfilming as well as saving and processing in electronic systems.

United Kingdom and Ireland

Bohle Ltd. Fifth Avenue Tameside Park · Dukinfield Cheshire · SK16 4PP

T +44 161 3421100 F +44 161 3440111

info@bohle.ltd.uk