




Wallbarn - Technical Datasheet

3-8mm Fixed Height Pedestal

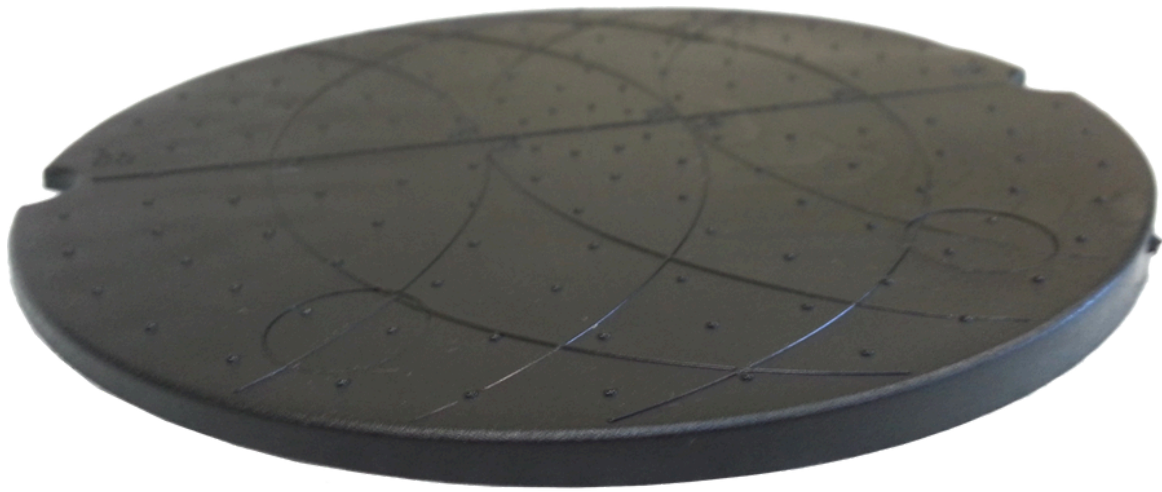

SP-RUB-003-Z

Product Description

Fixed circular PVC pads in a wedge shape that runs from 3mm to 8mm. It is designed for tricky areas such as very low finished floor levels rather than being used across a whole project. The circular pads allow the roof to be ventilated and at the same time provides easy access for inspection.

By using two of these pads together you can adjust the height from 3mm to 8mm and these heights are marked on the flat surface of the pedestal

Application

Two of the fixed height pedestals should be used together to achieve ultra low height support for paving or decking. By moving the wedges further apart you can achieve 3mm support or when pushed together, achieve a support height of 8mm. Installation in external areas helps to protect the waterproof surface or membrane.

Design

Each PVC pad is circular, measuring 150mm in diameter with a wedge shape which is 3mm at it's lowest point and 8mm at it's highest. The cross spacer is made from polypropylene and is available in thicknesses of 3, 4 or 5mm. The cross spacer is not fixed to the PVC pad.




Wallbarn - Technical Datasheet

Technical Data

The PVC pads can withstand a temperature range from -40 °C to +75 °C. This pad material is particularly resistant to sudden temperature changes; it resists acids, alkalines and atmospheric agents.

Material	PVC
Thickness	Wedge shape going from 3mm to 8mm
Outer Diameter	150mm
Weight Tolerance/ Bearing Capacity	8,000Kg
Appearance	Spherical guidelines and height markings
Optional Accessory - Cross Spacers	
Width of Cross Spacers available	3mm, 4mm & 5mm
Cross Spacer Height	10mm

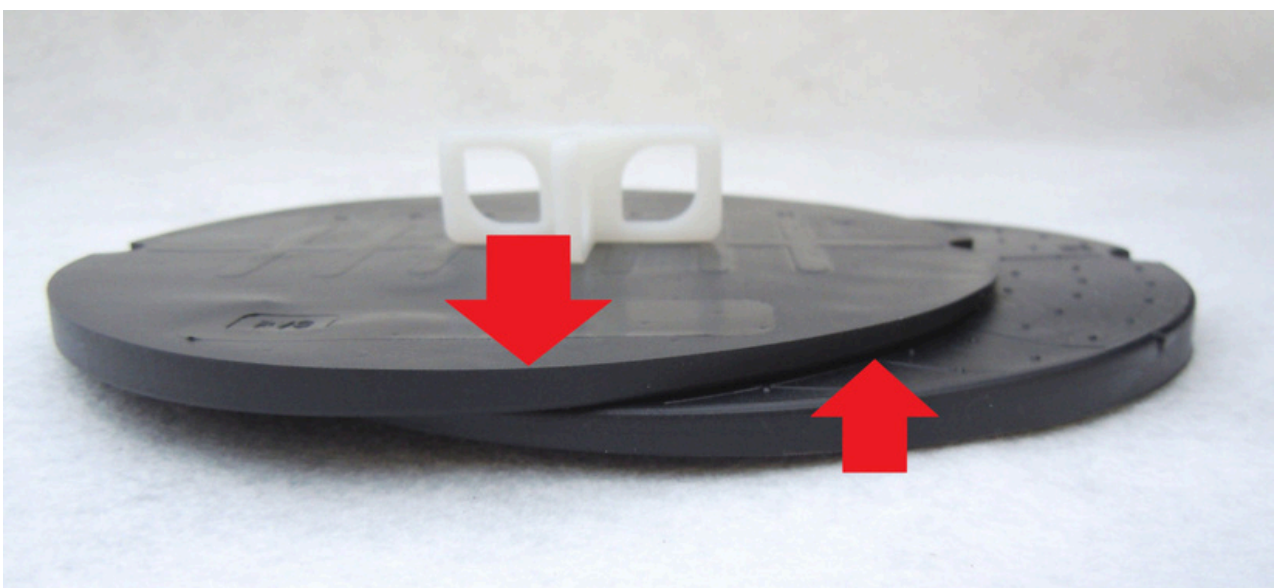

Wallbarn Ltd
Unit 16 Capital Business Centre
22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1028.v1

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : www.wallbarn.com