



**NEW**

**MAINS-POWERED SMOKE & HEAT ALARM FAMILY**

with slide-on Quick-Fit Base for faster, cleaner installations.




**BASE PLATE DESIGNED TO ENABLE RETROFIT**

Flared base plate allows neat retrofit, even of larger alarms.



**INTEGRATED CABLE-MANAGEMENT**

Built-in terminal block for quick and secure installation.

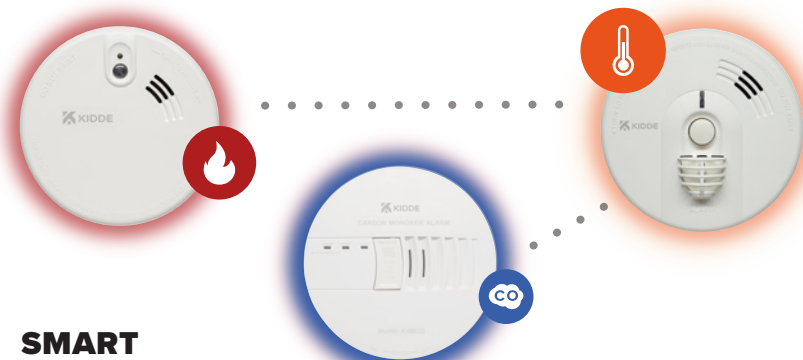

**SMART INTERCONNECT**

When one alarm is activated by smoke, heat or carbon monoxide, all other alarms are triggered.

The Kidde K4MCO CO alarm pictured above is fully compatible with these new alarms.



Contact your Kidde Sales Representative



03337 722 227

[www.uk.kidde.com](http://www.uk.kidde.com)

\*Images are representative only. Actual product may vary slightly.




KM 738872  
EN 14604:2005+AC:2008



KM 738879  
BS 5446-2:2003



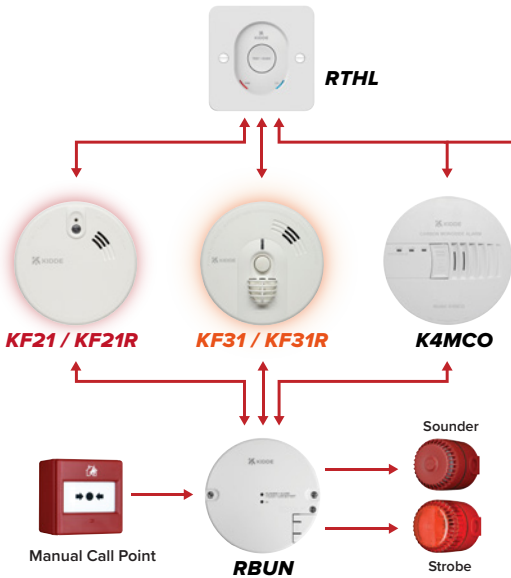

## EXTENDED FAMILY OF HARD-WIRED CONNECTED OPTIONS

## SPECIFICATION



<b>SENSOR TYPE</b>	Optical smoke	Optical smoke	Thermistor	Thermistor
<b>PRIMARY POWER SUPPLY</b>	230V AC, 50Hz			
<b>GRADE</b>	D2	D1	D2	D1
<b>BATTERY BACK-UP</b>	9V Alkaline	Rechargeable lithium	9V Alkaline	Rechargeable lithium
<b>MOUNTING OPTIONS</b>	Ceiling or wall mounting			
<b>OPERATING TEMPERATURE RANGE</b>	-10 °C to 40 °C			
<b>HUMIDITY RANGE</b>	Up to 93% RH (non-condensing)			
<b>STORAGE AND TRANSPORT</b>	-20 °C to 60 °C, 5% to 95% RH (non-condensing)			
<b>AUTOMATIC SELFTEST</b>	Circuitry is tested and unit chirps if fault is detected			
<b>CONNECTION</b>	Wired Quick-Fit Installation Base			
<b>ALARM SOUNDER</b>	Piezoelectric sounder (T3 pattern sound: three pulses - space - three pulses), soldered contacts			
<b>SOUND OUTPUT</b>	85dB (A) minimum at 3 metres			
<b>ALARM FREQUENCY</b>	3.2 kHz typical			
<b>FIXING</b>	Quick-Fit base features multiple fixing positions, including two 'T' slots with 57mm to 90mm screw spacing			
<b>ALARM DIMENSIONS (INCLUDING BASE)</b>	150mm x 53mm	150mm x 53mm	150mm x 66mm	150mm x 66mm
<b>ALARM WEIGHT (INCLUDING BATTERY)</b>	295g	260g	281g	245g
<b>CASE QUANTITY</b>	6 units			
<b>MANUFACTURER'S WARRANTY</b>	10-years			