



Sikament® 10

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament 10 is a super plasticising concrete admixture based on Vinyl co-polymers. **Sikament 10** is manufactured in the UK by Sika under strict quality control.

Sikament 10 can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability. **Sikament 10**, however, has the advantage of producing very high early strengths and thus makes the material suitable for use in pre-cast concrete applications and in areas where higher workability concrete and fast shutter stripping is required.

ADVANTAGES

Sikament 10 provides the following benefits:-

- * As a superplasticiser:
 - * Substantial improvements in workability without increased water or the risk of segregation
 - * Improved concrete density and surface finish
- * As a water reducer:
 - * Up to 30% water reducing. 40% increase in 28 day strengths are possible
 - * High strength after 8 hours and double 16 hour strength can be obtained with heated beds
 - * Increases frost and water resistant properties of the concrete because of reduced water content and low permeability
 - * Extremely high workability
 - * Little vibration required
 - * Can replace steam curing
 - * Faster mould turn round
 - * Higher strength at all ages
 - * High durability concrete
 - * Ultra-high strength concrete

Technical Data (typical)

Form:	Liquid
Colour:	Blue/Green
Specific Gravity:	1.1
Chloride Content % w/w:	Nil (ie less than 0.1% w/w)
Effect on Setting:	Little effect even on overdosing
Freezing Point °C:	-5°C
Storage:	Protect from frost
Suitability:	All Portland Cement including SRC

All above values are approximate.




In order to obtain the best results, **Sikament 10** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament 10** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament 10** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

The dosage rate of **Sikament 10** is best found after initial site trials. As a guide, an addition rate of 0.4–1.0% by weight of cementitious content (0.20–0.5 litres per 50 Kg cementitious) is recommended for 'flowing concrete', 0.6–1.2% for high strength concrete. (0.30–0.6 litres per 50 Kg cementitious).

PACKAGING

Sikament 10 is supplied in 25 litre and 200 litre drums. Bulk deliveries can be arranged.

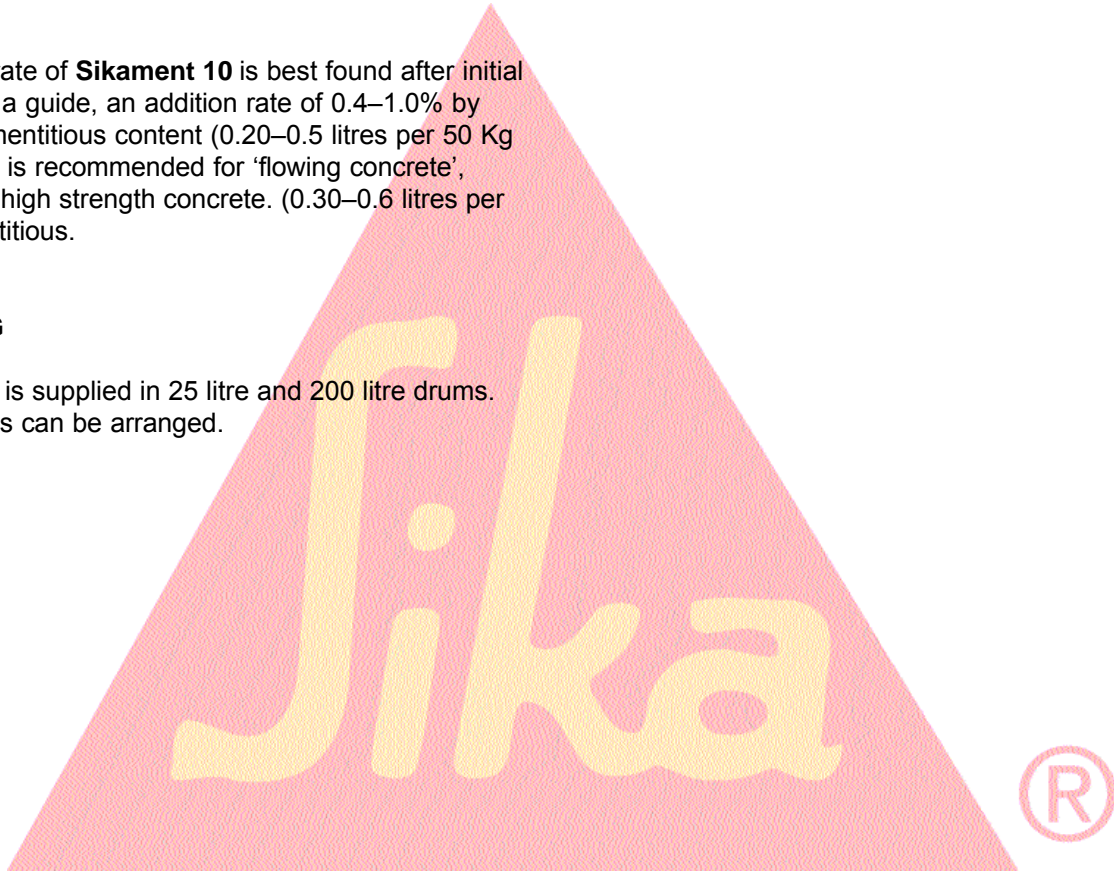

Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament® 555

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament 555 is a super plasticising concrete admixture based on new generation polymers. **Sikament 555** is manufactured in the UK by Sika under strict quality control.

Sikament 555 can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability. **Sikament 555**, however, has the advantage of producing very high early strengths and thus makes the material suitable for use in pre-cast concrete applications and in areas where higher workability concrete and fast shutter stripping is required.

ADVANTAGES

Sikament 555 provides the following benefits:—

- * As a superplasticiser:
 - * Substantial improvements in workability without increased water or the risk of segregation
 - * Set can be extended by increasing dose to achieve slump life required
 - * Improved concrete density and surface finish

- * As a water reducer:
 - * Up to 30% water reducing. 40% increase in 28 day strengths are possible
 - * Increases frost and water resistant properties of the concrete because of reduced water content and low permeability
 - * Extremely high workability
 - * Little vibration required
 - * Can replace steam curing
 - * Faster mould turn round
 - * Higher strength at all ages
 - * High durability concrete
 - * *Ideal* for power trowelled floors

Technical Data (typical)

Form:	Liquid
Colour:	Brown
Specific Gravity:	1.1
Chloride Content % w/w:	Nil (ie less than 0.1% w/w)
Effect on Setting:	Little effect even on overdosing
Freezing Point °C:	-5°C
Suitability:	All Portland Cement including SRC

All above values are approximate.



METHOD OF USE

In order to obtain the best results, **Sikament 555** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament 555** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament 555** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

0.4–1.0% BWC for water reduced concrete
1.0–2.5% BWC for flowing concrete

PACKAGING

Sikament 555 is supplied in 25 litre and 200 litre drums. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Minimum 1 year in sealed containers stored in dry warehouse condition (+5°C – +25°C). Protect from frost.



Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament® 600

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament 600 is a super plasticising concrete admixture based on Polycarboxilic Polymers. **Sikament 600** is manufactured in the UK by Sika under strict quality control.

Sikament 600 can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability, making it suitable for concrete flooring.

ADVANTAGES

Sikament 600 provides the following benefits:-

- * Effective at low or high dosages making it suitable for both laser screed or high workability hand laid floors.
- * Substantial improvements in workability without increased water or the risk of segregation
- * Normal set without retardation gives a more uniform setting across the floor area. Will not retard even if accidentally overdosed, unless more than four times normal dosage.
- * The loss of workability experienced with fibres can be compensated for by increasing the dosage. This improves placing characteristics without excessive bleeding.
- * Exhibits a more controlled bleeding which facilitates the hydration of dry shake toppings and helps prevent delamination (please consult Technical Sales Department for further information).
- * Improved concrete density and surface finish
- * As a water reducer:
- * Up to 30% water reducing. 40% increase in 28 day strengths are possible
- * High strength between 4 hours and 24 hours can be obtained
- * Increases frost and water resistant properties of the concrete because of reduced water content and low permeability
- * Extremely high workability
- * Higher strength at all ages
- * High durability concrete
- * 600-high strength concrete
- * *Ideal* for power trowelled floors

Technical Data (typical)

Form:	Liquid
Colour:	Brown
Specific Gravity:	1.10
Chloride Content % w/w:	Nil (ie less than 0.1% w/w)
Effect on Setting:	Little effect even on overdosing
Freezing Point °C:	-5°C
Suitability:	All Portland Cement including SRC

All above values are approximate.



METHOD OF USE

In order to obtain the best results, **Sikament 600** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament 600** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament 600** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

The dosage rate of **Sikament 600** is best found after initial site trials. As a guide, an addition rate of 0.4–1.5% by weight of cementitious content (0.20–0.75 litres per 50 kg cementitious) is recommended for 'flowing concrete', 0.6–1.5% for high strength concrete. (0.30–0.75 litres per 50 kg cementitious) and for concrete floors 0.4–0.7%.

PACKAGING

Sikament 600 is supplied in 25 litre and 200 litre drums. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Minimum 1 year in sealed containers stored in dry warehouse condition (+5°C – +25°C). Protect from frost.



Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament[®] FF

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament FF is a super plasticising concrete admixture based on Melamine-Formaldehyde. **Sikament FF** is manufactured in the UK by **Sika** under strict quality control.

Sikament FF can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability. **Sikament FF**, however, has the advantage of producing very high early strengths and thus makes the material suitable for use in pre-cast concrete applications and in areas where higher workability concrete and fast shutter stripping is required.

ADVANTAGES

Sikament FF provides the following benefits:-

As a superplasticiser:

- * Substantial improvements in workability without increased water or the risk of segregation.
- * Normal set without retardation, even if accidentally over-dosed.
- * Improved concrete density and surface finish.

As a water reducer:

- * Up to 30% water reducing. 40% increase in 28 day strengths are possible.
- * High strength after 8 hours and double 16 hour strength can be obtained.
- * Increases frost and water resistant properties of the concrete because of reduced water contents and low permeability.
- * Extremely high workability
- * Little vibration required
- * Can replace steam curing
- * Faster mould turn round
- * Higher strength at all ages
- * High durability concrete
- * Ultra-high strength concrete
- * Ideal for power trowelled floors

Technical Data (typical)

Form:	Liquid
Colour:	Brown
Specific gravity:	1.23
Chloride content % w/w:	Zero (ie less than 0.1% w/w)
Freezing point °C:	-5°C

All above values are approximate.



METHOD OF USE

In order to obtain the best results, **Sikament FF** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament FF** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament FF** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

The dosage rate of **Sikament FF** is best found after initial site trials. As a guide, an addition rate of 0.4-2.0% by weight of cementitious content (0.20-1 litres per 50 kg cementitious) is recommended for 'flowing concrete', 0.6-2% for high strength concrete. (0.30-1.0 litres per 50 kg cementitious).

COMPATIBILITY

All Portland Cement including SRC

PACKAGING

Sikament FF is supplied in 25 litre and 200 litre containers. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Sikament FF should be stored in sealed containers between 5°C and 30°C and protected from frost. Under these conditions the shelf life is 1 year minimum.



Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament[®] LA45

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament LA45 is a super plasticising concrete admixture based on Napthlene-Formaldehyde. **Sikament LA45** is manufactured in the UK by **Sika** under strict quality control.

Sikament LA45 can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability. **Sikament LA45**, however, has the advantage of producing very high early strengths and thus makes the material suitable for use in pre-cast concrete applications and in areas where higher workability concrete and fast shutter stripping is required.

ADVANTAGES

Sikament LA45 provides the following benefits:-

As a superplasticiser:

- * Substantial improvements in workability without increased water or the risk of segregation.
- * Normal set without retardation, even if accidentally over-dosed.
- * Improved concrete density and surface finish.

As a water reducer:

- * Up to 30% water reducing. 40% increase in 28 day strengths are possible.
- * High strength after 8 hours and double 16 hour strength can be obtained.
- * Increases frost and water resistant properties of the concrete because of reduced water contents and low permeability.

Technical Data (typical)

Form:	Liquid
Colour:	Brown
Specific gravity:	1.12
Chloride content % w/w:	Zero (ie less than 0.1% w/w)
Effect on setting:	Slightly longer setting time
Freezing point °C:	-5°C

All above values are approximate.

- * Extremely high workability
- * Little vibration required
- * Can replace steam curing
- * Faster mould turn round
- * Higher strength at all ages
- * High durability concrete
- * Ultra-high strength concrete
- * Ideal for power trowelled floors



METHOD OF USE

In order to obtain the best results, **Sikament LA45** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament LA45** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament LA45** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

The dosage rate of **Sikament LA45** is best found after initial site trials. As a guide, an addition rate of 0.4-2.0% by weight of cementitious content (0.20-1 litres per 50 kg cementitious) is recommended for 'flowing concrete', 0.6-2% for high strength concrete. (0.30-1.0 litres per 50 kg cementitious).

COMPATIBILITY


All Portland Cement including SRC

PACKAGING

Sikament LA45 is supplied in 25 litre and 200 litre containers. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Sikament LA45 should be stored in sealed containers between 5°C and 25°C and protected from frost. Under these conditions the shelf life is 1 year minimum.

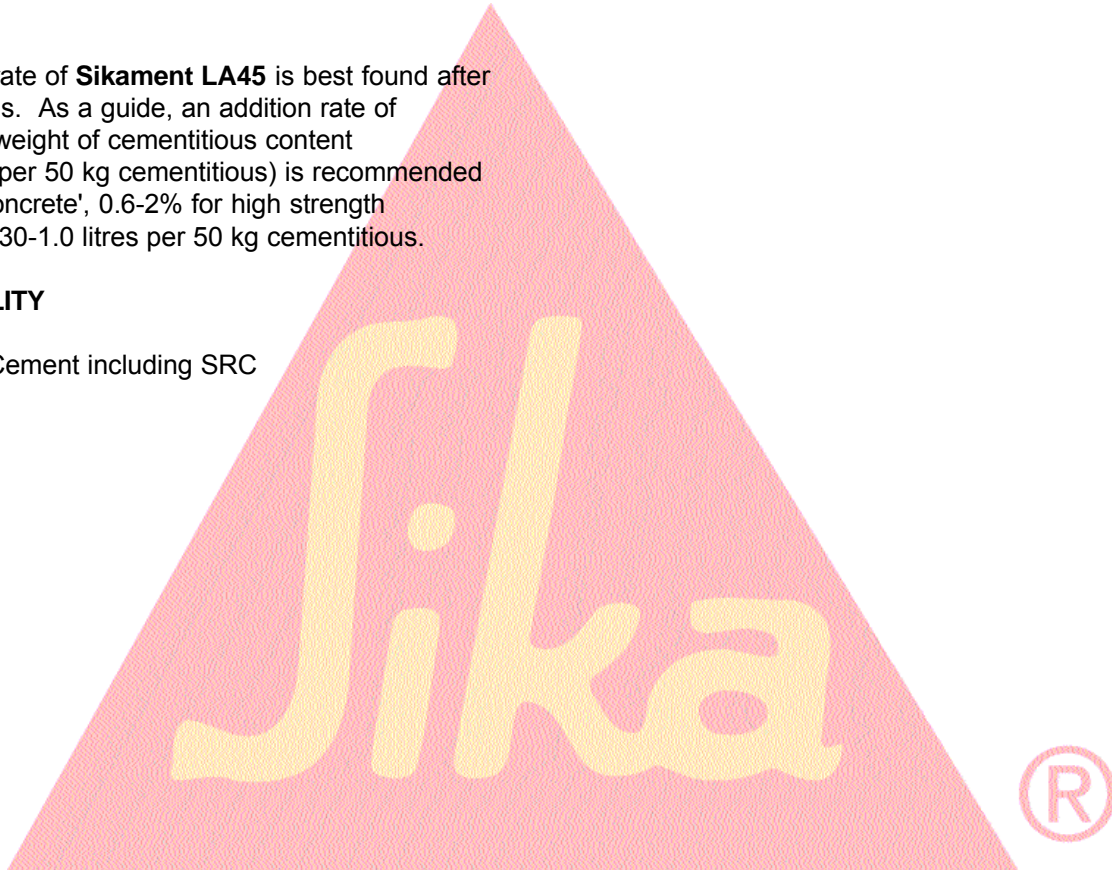

Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament[®] N & DE

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament N & DE is a super plasticising concrete admixture based on Naphlene-Formaldehyde.

Sikament N & DE is manufactured in the UK by **Sika** under strict quality control.

Sikament N & DE fully complies with BS5075 Part 3.

Sikament N & DE can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability. **Sikament N & DE**, however, has the advantage of producing very high early strengths and thus makes the material suitable for use in pre-cast concrete applications and in areas where higher workability concrete and fast shutter stripping is required.

ADVANTAGES

Sikament N & DE provides the following benefits:-

As a superplasticiser:

- * Substantial improvements in workability without increased water or the risk of segregation.
- * Normal set without retardation, even if accidentally over-dosed.
- * Improved concrete density and surface finish.

As a water reducer:

- * Up to 30% water reducing. 40% increase in 28 day strengths are possible.
- * High strength after 8 hours and double 16 hour strength can be obtained.
- * Increases frost and water resistant properties of the concrete because of reduced water contents and low permeability.
- * Extremely high workability
- * Little vibration required
- * Can replace steam curing
- * Faster mould turn round
- * Higher strength at all ages
- * High durability concrete
- * Ultra-high strength concrete
- * Ideal for power trowelled floors

Technical Data (typical)

	N	DE
Form:	Liquid	Liquid
Colour:	Brown	Brown
Specific gravity:	1.20	1.20
Chloride content % w/w:	Zero (ie less than 0.1% w/w)	Zero
Effect on setting:	Slightly longer setting time	
Freezing poin t °C:	-5°C	-5°C
Defoamer:	No	Yes

All above values are approximate.



METHOD OF USE

In order to obtain the best results, **Sikament N & DE** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament N & DE** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament N & DE** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE

The dosage rate of **Sikament N & DE** is best found after initial site trials. As a guide, an addition rate of 0.4-2.0% by weight of cementitious content (0.20-1 litres per 50 kg cementitious) is recommended for 'flowing concrete', 0.6-2% for high strength concrete. (0.30-1.0 litres per 50 kg cementitious).

COMPATIBILITY

All Portland Cement including SRC

PACKAGING

Sikament N & DE is supplied in 25 litre and 200 litre containers. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Sikament N & DE should be stored in sealed containers between 5°C and 30°C and protected from frost. Under these conditions the shelf life is 1 year minimum.



Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com





Sikament[®] Ultra

Super Plasticiser

Technical Data Sheet

DESCRIPTION

Sikament Ultra is a super plasticising concrete admixture based on Melamine-Formaldehyde. **Sikament Ultra** is manufactured in the UK by Sika under strict quality control.

Sikament Ultra can be used to either produce 'flowing concrete' or enable large water reductions to be made for the same workability, making it suitable for concrete flooring.

ADVANTAGES

Sikament Ultra provides the following benefits:-

- * Effective at low or high dosages making it suitable for both laser screed or high workability hand laid floors
- * Substantial improvements in workability without increased water or the risk of segregation
- * Normal set without retardation gives a more uniform setting across the floor area. Will not retard even if accidentally overdosed, unless more than four times normal dosage
- * The loss of workability experienced with fibres can be compensated for by increasing the dosage. This improves placing characteristics without excessive bleeding
- * Exhibits a more controlled bleeding which facilitates the hydration of dry shake toppings and helps prevent delamination (please consult Technical Sales Department for further information)
- * Improved concrete density and surface finish
- * As a water reducer:
- * Up to 30% water reducing. 40% increase in 28 day strengths are possible
- * High strength between 4 hours and 24 hours can be obtained
- * Increases frost and water resistant properties of the concrete because of reduced water content and low permeability
- * Extremely high workability
- * Higher strength at all ages
- * High durability concrete
- * Ultra-high strength concrete
- * *Ideal* for power trowelled floors

Technical Data (typical)

Form:	Liquid
Colour:	Brown
Specific Gravity:	1.23
Chloride Content % w/w:	Nil (ie less than 0.1% w/w)
Effect on Setting:	Little effect even on overdosing
Freezing Point °C:	-5°C
Suitability:	All Portland Cement including SRC

All above values are approximate.



METHOD OF USE

In order to obtain the best results, **Sikament Ultra** must be used with specially designed mixes designed for the particular requirements of strength, cost saving or flowing concrete. For maximum dispersion **Sikament Ultra** should be added with the mixing water. On no account should it be added to the dry cement. **Sikament Ultra** can be added at the plant or on site, when added at site the mixer trucks should rotate their drums at maximum revolutions until a uniform mix is achieved.

DOSAGE


The dosage rate of **Sikament Ultra** is best found after initial site trials. As a guide, an addition rate of 0.4–2.0% by weight of cementitious content (0.20–1 litres per 50 kg cementitious) is recommended for 'flowing concrete', 0.6–2% for high strength concrete. (0.30–1.0 litres per 50 kg cementitious. For concrete floors 0.45–0.7%.

PACKAGING

Sikament Ultra is supplied in 25 litre and 200 litre drums. Bulk deliveries can be arranged.

STORAGE AND SHELF LIFE

Minimum 1 year in sealed containers stored in dry warehouse condition (+5°C – +25°C). Protect from frost.

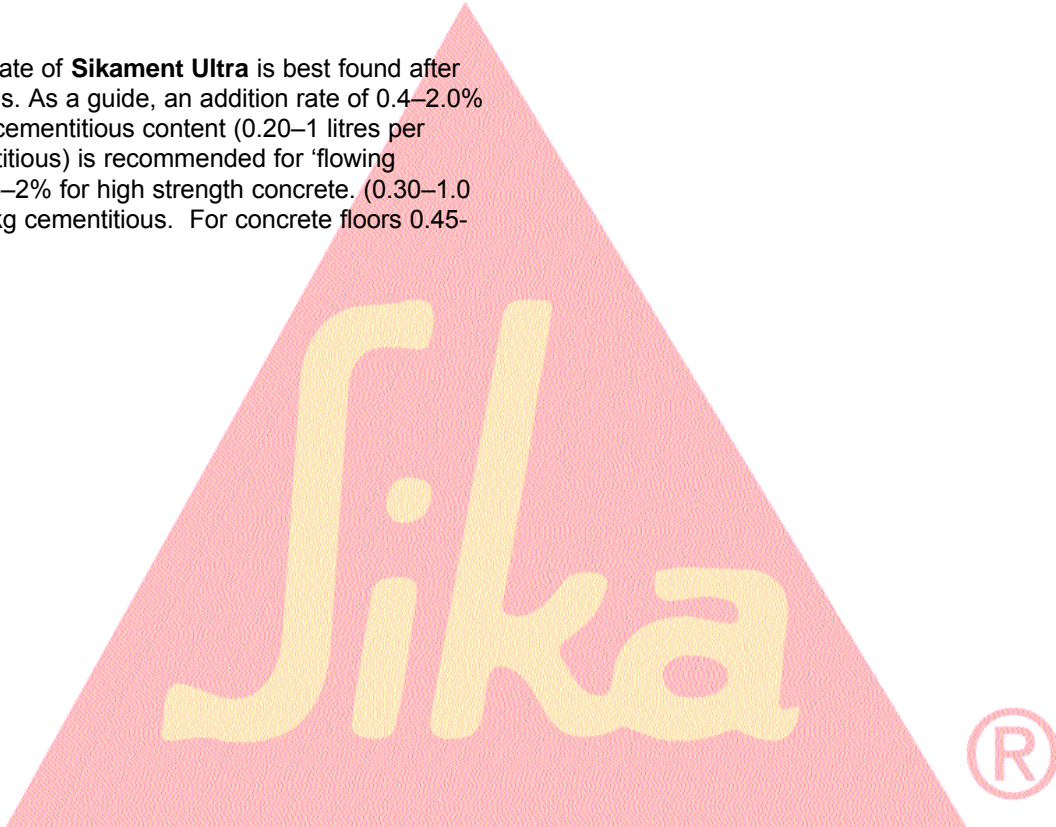

Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com

