TECHNICAL DATASHEET





TT SEALING UFO

A hydrophilic ring made from synthetic, waterswellable rubber that fits securely around the exterior of the formwork spacer and presents water infiltrating through cracks in the surrounding concrete.











TT Sealing UFO is designed to offer a more effective, quick and secure sealing solution than mastic or a length of water bar – both of which can be dislodged during the concrete pour.

A hydrophilic ring made from synthetic, water-swellable rubber that fits securely around the formwork spacer and prevents water infiltrating through cracks in the surrounding concrete. The water swellable sealing products are based on the unique Active Sealing technology. Our products expand on contact with water. This is how they create an active seal to combat moisture infiltration. The products are self-correcting and thus also sealing the unevenness and imperfections of the concrete.

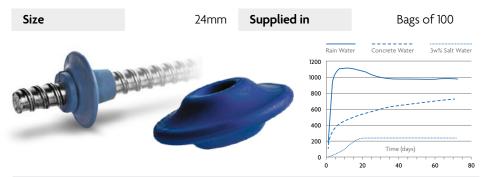

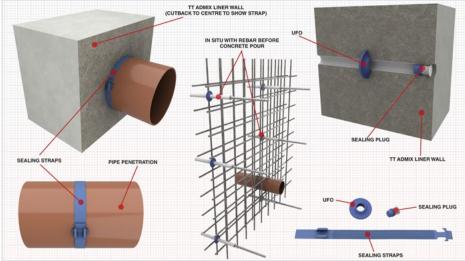

TECHNICAL DATASHEET

	PRODUCT NAME ∅ inner diameter	PRODUCT CODE	COLOR	QUANTITY/BAG	QUANTITY/BOX	QUANTITY/PALET
0	SEALING RING 20x2 mm	T684.A000.ZI01	BLUE	200	5.000	90.000
0	SEALING RING 24 mm	T683.A000.ZI01	BLUE	100	2.500	45.000
•	SEALING UFO 12 mm	T699.A000.ZI01	BLUE	100	1.000	18.000
•	SEALING UFO 17 mm	T695.B000.ZI01	BLUE	100	700	12.600
0	SEALING UFO 24 mm	T695.A000.ZI01	BLUE	100	700	12.600
0	SEALING UFO 31 mm	T720.A000.ZI01	BLUE	50	500	9.000
0	SEALING UFO 39 mm	T720.B000.ZI02	BLUE	50	500	9.000

The Sealing UFO is available in different sizes and can be customized to your specific formwork.

	PRODUCT NAME Ø inner diameter	PRODUCT CODE	COLOR	QUANTITY/ BAG	QUANTITY/ BOX	QUANTITY/ PALET	Tie-rod connectors in combination with :
	SEALING CONNECTOR 15 mm	T713.A000.ZE01	BLUE	50	500	9.000	SEALING UFO 24 mm
	SEALING CONNECTOR 20 mm	T721.C000.ZE01	BLUE	50	500	9.000	SEALING UFO 31 mm
	SEALING CONNECTOR 23 mm	T721.A000.ZE01	BLUE	50	500	9.000	SEALING UFO 31 mm
	SEALING CONNECTOR 26 mm	T721.B000.ZE01	BLUE	50	500	9.000	SEALING UFO 39 mm
10 m	SEALING CONNECTOR 30 mm	T721.D000.ZE01	BLUE	50	500	9.000	SEALING UFO 39 mm

The Sealing Connector is slid over the tie rod and anchored with the Sealing UFO or the Sealing Ring.

FUNCTIONING SEALING CONNECTOR WITH UFO



Position the Sealing Connector against the tie rod



Close the Sealing Connector




Slide the Sealing UFO over the tie rod



Anchor the Sealing Connector using the Sealing UFO

WITH SEALING RING







Anchor the Sealing Connector using the Sealing Ring

Boran Court, Network 65 Business Park, Hapton,
Burnley Lancashire BB11 5TH **t:** +44 (0)1282 473 100 **e:** info@wykamol.com

www.wykamol.com

Unit 3-5 Crayford Commercial Centre, Greyhound Way, Kent, DA1 4HF **t:** +44 (0)1322 318 830 **e:** info@tritonsystems.co.uk www.tritonsystems.co.uk

The information in this technical datasheet is given in good faith and was correct at the time of publication, but does not purport to be all inclusive. We reserve the right to update this information at any time without prior notice. All data is obtained through extensive testing in stringent laboratory conditions, however as we have no control over site conditions or work executed we accept no liability for incidental and/or consequential property damage arising out of the use of this product. The Wykamol Group's standard terms and conditions of sale apply.

