

WC FLUSHVALVE KIT

WC03-022

The DVS no-touch WC flushing system is an electronically operated drop valve which replaces the traditional syphon and delivers a WRAS Approved 4L single flush from the cistern to the lavatory bowl.

PRODUCT NUMBER

WC03-022 WC Flushvalve Kit

TECHNICAL DATA

Flushvalve:




Weight	1.05 kg
Material	ABS Plastic
Power supply	Through WC control box
Outlet size	1 1/2"
Internal overflow	Yes
Type of operation	Sensor operation or Tactile button
Type of mounting	WC flush valve
Functional principle	Electronic self closing
Failsafe close	Yes

Control Box:

Weight	1 kg
Material	ABS Plastic
Run Times	0.25 - 6.75 seconds
Power source	230V a.c.
IP rating	54
Amps	0.07A (MAX)
Frequency	50Hz
Voltage	230 V.a.c.

Wave On Sensor:

Material	Stainless Steel
Surface finish	Brushed
Gross weight	0.2 kg
Overall dimensions	70mm (L) x Ø50mm
Thread diameter	Ø21mm (1/2" BSP)
Type of mounting	Wall mounted (Ø22mm drill hole required)
Operation type	Tactile switch
Cable length	3m

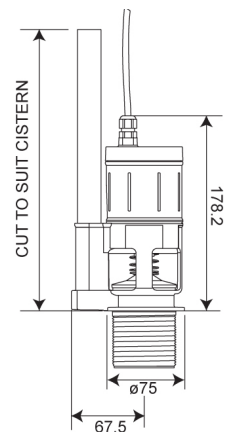

ALL DIMENSIONS IN MM



2016-09-30, Dart Valley Systems

