

WC FLUSHVALVE KIT

WC03-029

The DVS no-touch WC flushing system is an electronically operated drop valve which replaces the traditional syphon and delivers a WRAS Approved 4L single flush from the cistern to the lavatory bowl.

PRODUCT NUMBER

WC03-029 WC Flushvalve Kit

TECHNICAL DATA

Flushvalve:




Weight	1.05 kg
Material	ABS Plastic
Power supply	Through WC control box
Outlet size	2"
Internal overflow	Yes
Type of operation	Sensor operation or Tactile button
Type of mounting	WC flush valve
Functional principle	Electronic self closing
Failsafe close	Yes

Control Box:

Weight	1 kg
Material	ABS Plastic
Run Times	0.25 - 6.75 seconds
Power source	230V a.c.
IP rating	54
Amps	0.07A (MAX)
Frequency	50Hz
Voltage	230 V.a.c.

Tactile Switch:

Material	Stainless Steel
Surface finish	Brushed
Gross weight	0.2 kg
Overall dimensions	70mm (L) x Ø50mm
Thread diameter	Ø21mm (½" BSP)
Type of mounting	Wall mounted (Ø22mm drill hole required)
Operation type	Tactile switch
Cable length	3m

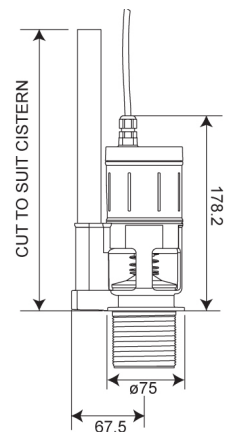

ALL DIMENSIONS IN MM

2018-05-18, Dart Valley Systems

